



35mm SURVEILLANCE CAMERA **SURVEILLA 35II**


MODEL : SC-72 CAMERA
SC-2D CONTROLLER
IP-5010 HAND SWITCH



FEATURES

- Economical Camera System: Low-cost camera and its little maintenance
- Wireless Remote Control: Wireless shooting by various portable switches
- 72 Frames Shooting (Max.): Continuous shooting for approx. 2.5 minutes in case of emergency
- High Performance: Complete shooting by full-automatic camera and micro-computer controller
- Simple Operation: Easy daily operation and film exchange
- Compact Camera with Good Design: Small-sized camera free from a sense of oppression

SURVEILLA 35II SYSTEM CHART

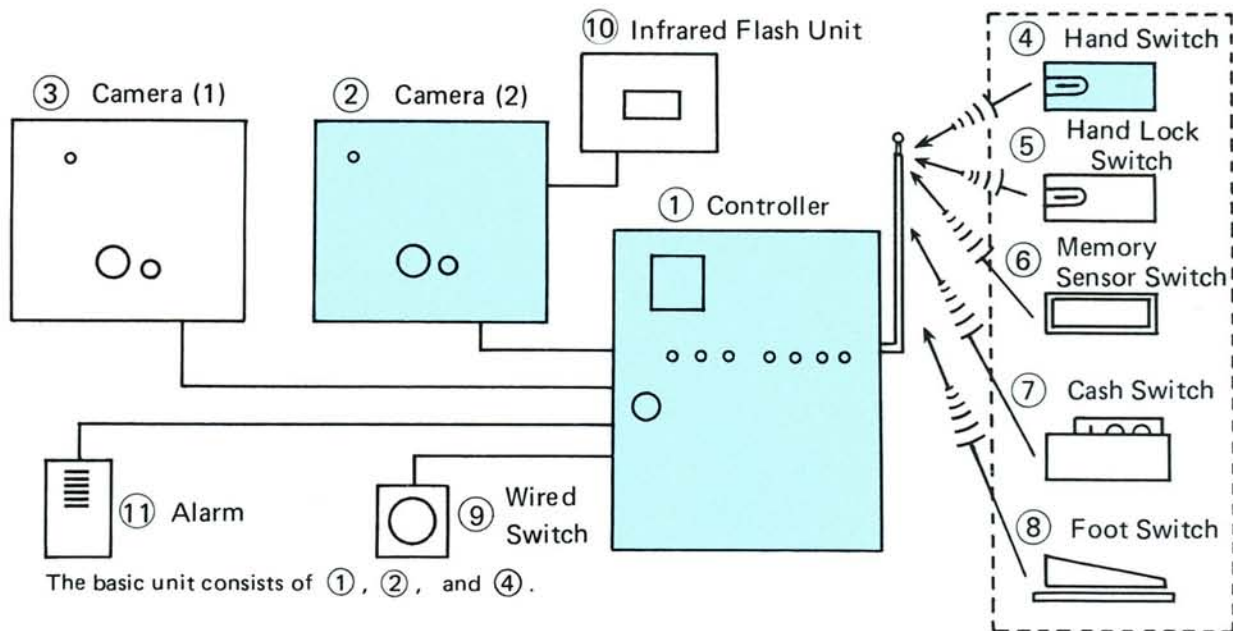

No.	Name of Device	Description
1	Controller	A heart of this system to control the camera and alarm by receiving the instructions from each wireless switch and wired switch.
2	Camera (1)	Camera part to make actual shooting.
3	Camera (2)	Stand-by camera to make a wide range of shooting.
4	Hand Switch	Handy-type transmitter.
5	Hand Lock Switch	Transmitter to lock on/off operation of camera by finger.
6	Memory Sensor Switch	Transmitter to photograph automatically any intruder who may enter an empty room.
7	Cash Switch	As soon as bills are taken away from this cash switch and handed to any burglar in case of holdup, this switch comes into action and shooting starts.
8	Foot Switch	Foot-operated shooting can be made.
9	Wired Switch	Shooting switch with cord to be fixed on the desk.
10	Infrared Flash Unit	Shooting can be made without any robber's knowing at night.
11	Alarm	Alarm system to tell an urgent condition to the outside.

SPECIFICATIONS

CAMERA

Shutter:	1/2-1/500, Electronically programmed mechanical shutter
Shutter Interval:	Adjustable to one frame every 2 or 7 seconds
Lens:	Focal length: 35 mm Angle of view: 62° F: 3.2
Film:	Standard 35 mm film Size of negative or slide: 24x36 mm
Indicator LED:	Power and Film run
Strobe Terminals:	For optional infrared strobe
Film Advance and Rewind:	Automatic motor drive
Dimensions:	145(H) x 150(W) x 65(D) mm
Weight:	1,000 g

CONTROLLER

Power Source:	12VDC
---------------	-------

Power Consumption:	3.5 W max. (stand by) 22 W max. (one camera operation) 30 W max. (two cameras operation)
Controls:	Micro-computer control Wireless remote control
Operation:	Emergency shooting Optional shooting
Output:	Emergency signal relay terminals
Sound Signal:	Film end, Film rewind
Indicator LED:	Power, Signal in, Emergency, Film end and Film run
Dimensions:	260(H) x 190(W) x 110(D) mm
Weight:	2,500 g (For overseas)

TRANSMITTER

Power Source:	9 V DC (006P Battery or equivalent)
Field Strength:	15μV/M at 100 m
Dimensions:	115(H) x 50(W) x 30 (D) mm
Weight:	70 g. Approx. (without battery)
Battery Life:	1 year, Approx. (using 10 times a day 3 seconds each time)



MANUFACTURED BY:
OKUDA SURVEILLANCE CAMERA INC.
Head Office:
1-10-1 Yokogawa, Nishiku, Hiroshima, Japan
Tel: 082-292-2600
Telex: 0652-759(OKUDA J)